

Atlas

Lighting Products

FLOODLIGHTING FLL16 Series 16" FloodLight HID Lighting

Catalog Number: _____


Notes: _____

FEATURES AND SPECIFICATIONS


Metal Halide:
175W - 400W
High Pressure Sodium:
250W - 400W
Phos Start:
320W - 400W

Specifications:
Overall height:
22.505" (57.15 cm)
Width:
16.44" (41.75 cm)
Weight:
35 lbs 715.67 kg.

UL LISTED FOR GROUND MOUNTING
UL LISTED FOR WET LOCATIONS
PREMIERED WITH CORD
DIE CAST ALUMINUM HOUSING
HINGED FACE FRAME
TEMPERED GLASS LENS
LAMP INCLUDED

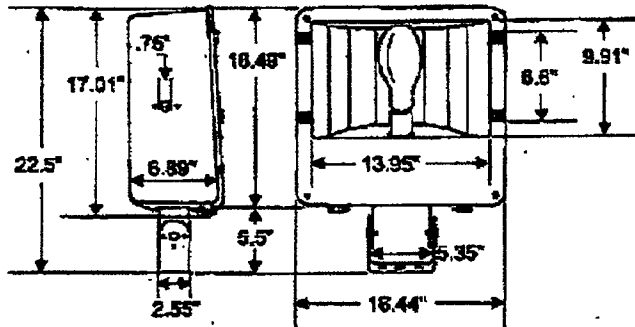


Mounting Detail:
Trunion



ORDERING INFORMATION

Choose the lighting option combination that best suits your needs and write it on the appropriate line. Order accessories as separate order numbers (shipped separately).

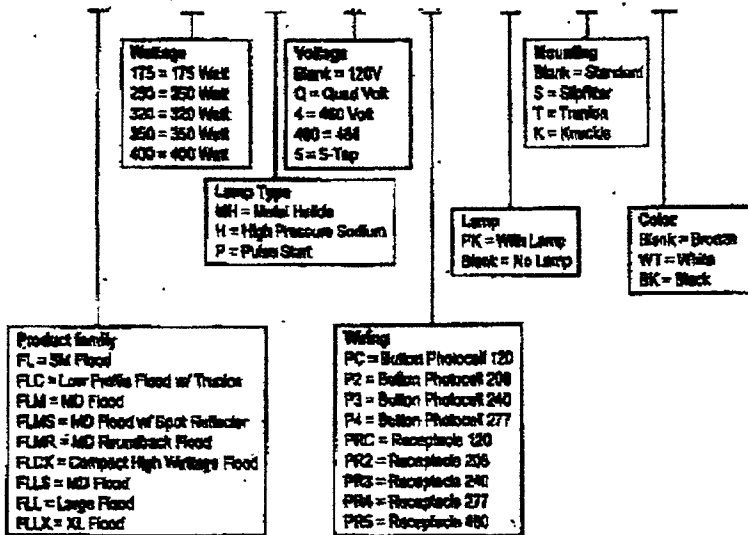


ACCESSORIES

- 330-017 Glass Shield for FLL, Bronze
- 330-018 Wireguard for FLL
- 330-015 Baffle for FLL, Bronze
- 330-010-1 Spigot for FLL with Cord, Bronze
- 330-003 FLL Face Frame Assembly, Bronze

PHOTOMETRICS

400W MH @ 25' Mounting Height and Aimed 45° below horizontal
1 footcandle/ft



Actual performance can vary depending on operating conditions. Specifications are subject to change without notice.

ATLAS LIGHTING PRODUCTS, INC.

PO BOX 2348 | BURLINGTON, NC 27218
800-848-8486 | FAX: 336-227-8110 | www.atlaslightingproducts.com

Atlas

Lighting Products

WALL LIGHTING
WLXD18 Series
18" Extra Deep
Large Wall Light

Catalog Number: _____



Notes: _____

FEATURES AND SPECIFICATIONS


Metal Kettle:
 250W - 400W
High Pressure Sodium:
 250W - 400W
Pulse Start:
 320W - 400W

Specifications:
Overall height:
 9.008" (22.86 cm)
Width:
 18.195" (46.21 cm)
Weight:
 32 lbs / 14.51 kg

UL LISTED FOR WET LOCATIONS
DIE CAST ALUMINUM HOUSING
BOROSILICATE GLASS LENS
THREADED APERTURES FOR CONDUIT
& PHOTO CONTROL
LAMP INCLUDED




Mounting Detail:



ORDERING INFORMATION

Choose the suitable catalog number for each of your needs and enter it on the appropriate line. Order accessories as separate catalog numbers (shown separately).

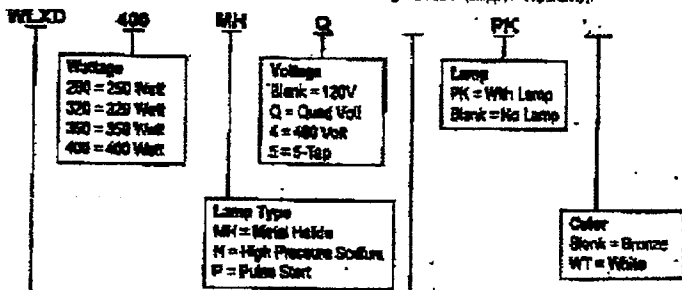

Product family
 WL = Tall Polycarbonate Wallpack
 WLG = Tall Glass Lens Wallpack
 WLS = SM Polycarbonate Wallpack
 WLSG = SM Glass Lens Wallpack
 WLM = Medium Wallpack
 WLAC = Cut Off Medium Wallpack
 WLMR = Round Wall Sconce
 WLMRU = Round Wall Sconce w/ Uplight
 WLMSS = Square Wall Sconce
 WLMFC = Full Cut Off Medium Wallpack
 WLXD = LG Extra Deep Wallpack
 WLXDC = Cut Off LG Extra Deep Wallpack
 WLXDFC = Full Cut Off LG Extra Deep Wallpack
 WLXSL = Slimline Wallpack


Wiring
 PC = Button Photocell 120
 P2 = Button Photocell 205
 P3 = Button Photocell 240
 P4 = Button Photocell 277
 P5 = Button Photocell 480

ACCESSORIES

- 289-020-1 Wireguard for WLXD
- 289-023-1 Polycarbonate Guard for WLXD
- 289-015 Full Cut-Off Shield for WLXD-Bronze
- 328-015WT Full Cut-Off Shield for WLXD-White
- 218-011 WLXD Face Frame Assembly-Bronze
- 218-011WT WLXD Face Frame Assembly-White
- 238-002 Button 120V Photo Control
- 238-006 Button 208-277V Photo Control

PHOTOMETRICS

400W MH @ 25' Mounting Height
 footcandles



Actual performance may vary depending on operating conditions. Specifications are subject to change without notice.

ATLAS LIGHTING PRODUCTS, INC.

PO BOX 2348 | BURLINGTON, NC 27216
 800-848-8485 | FAX: 336-227-0110 | www.atlaslightingproducts.com

Technical drawing of 15' and 20' Type I-O Poles. The drawing shows two pole configurations: a 15' pole and a 20' pole. Both poles have a length dimension labeled 'Length (ft)'. The 15' pole has a diameter of 7" and a 15' length. The 20' pole has a diameter of 7-3/4" and a 20' length. Both poles feature a taper of 0.162 in/R. The drawing also shows a standard pipe tenon at the top, which is 4-1/2" in diameter and 6" in length. A 1" void is indicated between the pole and the tenon. A 3" x 5" hand hole with a cover is shown on the side of the pole. Ground wires are shown as # 6 or # 8 wires. A 3/4" or 1" ELL is also indicated. The drawing includes a table of dimensions for the poles and a table of standard pipe tenon sizes.

Length (ft)	Embed (ft)	Weight (lbs)
15	5	500
20	5	770

Length (ft)	Max. EPA (ft)	
	Wind velocity (MPH)	
	120	130
15	21	17
20	14	11

STANDARD PIPE TENON SIZE	
Nominal Diameter (in)	Outside Diameter (in)
2	2 3/8
2 1/2	2 7/8
3	3 1/2
3 1/2	4

15' & 20' Type I-O Poles

Pre-Cast Specialties, Inc. **PCSI**

5900 N.W. 72nd Avenue Miami, Florida 33166 (305) 885-9991 Tel, (305) 887-8880 Fax